


FTUMaX® - Mobile Fuel Treatment Unit

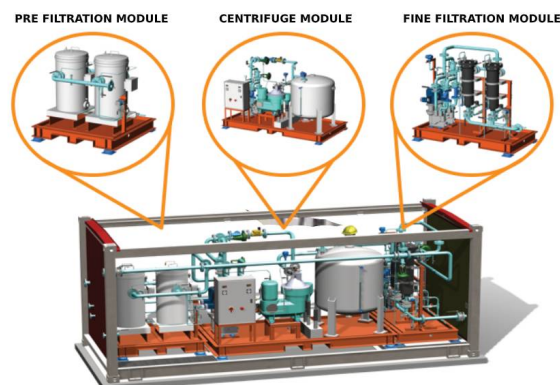

FTUMaX® - Mobile Fuel Treatment Unit

Our FTUMaX® is modular, fully containerized and custom-made. The mobile fuel treatment unit filters the liquid fuel (diesel grade 2) and separates the impurities to ensure the required high quality filtration grade for the use of the fuel in turbines.

Advantages

- Fully containerized (ISO 20' or 40' container)
- Compact

- Easily transported
- Custom-made to suit customer requirements

Typical Features of 20' containerized package

- Fuel: liquid fuel
- Temperature: 5 - 40 °C
- Flow rate: 0 - 100 l/min
- Outlet pressure: 0 - 6 bar
- Filtration efficiency: > 99.95 %

Ask info

<